


METALLIZED POLYESTER FILM CAPACITORS - MEA SERIES (DIP) 金屬化聚酯膜電容(臥式)

INTRODUCTION

- 1.HIGHT STABILITY.
- 2.NON-INDUCTIVE.
- 3.MINIATURE SIZE.
- 4.SELF-HEALING CHARACTERISTICS.
- 5.POLYESTER WRAPPING,WITH EPOXY RESIN END FILL.
- 6.EXCELLENT FOR USED IN COUPLING,BY-PASS,R.F.FILTERING,AND SOLID-STATE APPLICATION WHERE SIZE IS CRITICAL .

SPECIFICATION:

- 1.OPERATING TEMPERTURE : $-40^{\circ}\text{C}\sim +85^{\circ}\text{C}$
- 2.CAPACITANCE RANGE :0.01~10uF
- 3.CAPACITANCE TOLERANCE : $\pm 1\%(F), \pm 2\%(G), \pm 5\%(J), \pm 10\%(K)$
- 4.RATED VOLTAGE :100VDC, 250VDC, 400VDC, 630VDC.
- 5.DISSIPATION FACTOR :1.0%MAX AT 1KHz,25 $^{\circ}\text{c}$
- 6.INSULATION RESISTANCE : $>9000\text{M}\Omega$ ($C\leq 0.33\text{uF}$)
 $>3000\text{M}\Omega / \text{uF}$ ($C>0.33\text{uF}$) AT25 $^{\circ}$

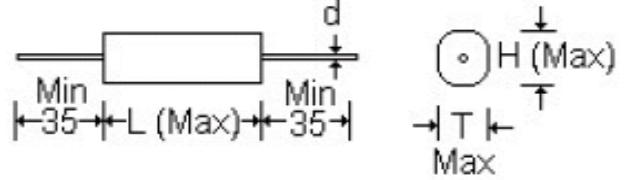

CAPACITANCE		2A(100VDC)				2E(250VDC)				2G(400VDC)				2J(630VDC)			
SYMBOL	u F	L	H	T	d	L	H	T	d	L	H	T	d	L	H	T	d
103	0.01									16	7	4	0.6	16	8	5	0.6
153	0.015									16	7	4	0.6	16	8	5	0.6
223	0.022									16	8	4	0.6	16	9	5	0.6
333	0.033									16	8	4	0.6	16	9	5	0.6
473	0.047					16	7	4	0.6	16	8	5	0.6	21	10	5.5	0.8
683	0.068					16	7	4	0.6	16	9	5	0.6	21	11	7	0.8
104	0.1	16	8	4	0.6	16	8.5	4	0.6	21	9	5	0.6	21	12	8	0.8
154	0.15	16	8	4	0.6	16	8.5	4	0.6	21	10	6	0.8	26	13	8	0.8
224	0.22	16	8	5	0.6	21	9	5	0.8	21	12	7.5	0.8	26	15	9	0.8
334	0.33	21	8	5	0.8	21	10	6	0.8	26	13	8	0.8	26	17	11	0.8
474	0.47	21	9	5	0.8	21	10	6	0.8	26	14	8	0.8	31	17	12	0.8
684	0.68	21	11	6	0.8	26	12	7	0.8	26	17	10	0.8	31	21	15	0.8
105	1	21	12	7	0.8	26	13	7	0.8	31	18	10.5	0.8	31	22	16	0.8
155	1.5	26	13	7.5	0.8	26	15	8.5	0.8	31	19	11	0.8				
225	2.2	26	14	8.5	0.8	31	16.5	9	0.8								
335	3.3	26	17.5	9.5	0.8	31	19	12	0.8								
475	4.7	31	18	11	0.8												
685	6.8	31	20	11	0.8												
106	10	31	22	12	0.8												

ORDER: MEA 104 10% 100V DIP