


# METALLIZED POLYESTER FILM CAPACITORS - MET SERIES (DIP)金屬化聚酯膜電容(臥式)

## INTRODUCTION

- 1.HIGHT STABILITY.
- 2.NON-INDUCTIVE.
- 3.MINIATURE SIZE.
- 4.SELF-HEALING CHARACTERISTICS.
- 5.POLYESTER WRAPPING,WITH EPOXY RESIN END FILL.
- 6.EXCELLENT FOR USED IN COUPLING,BY-PASS,R.F.FILTERING,  
AND SOLID-STATE APPLICATION WHERE SIZE IS CRITICAL

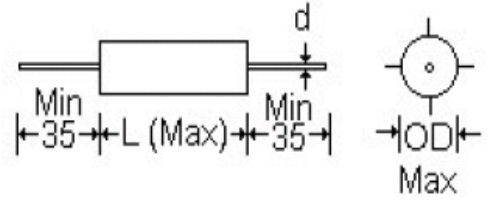

## SPECIFICATION:

- |                         |   |
|-------------------------|---|
| 1.OPERATING TEMPERTURE  | : -40° C~ +85° C                                      |
| 2.CAPACITANCE RANGE     | : 0.01~10uF   |
| 3.CAPACITANCE TOLERANCE | : ±1%(F), ±2%(G), ±5%(J), ±10%(K)                     |
| 4.RATED VOLTAGE         | : 100VDC, 250VDC, 400VDC, 630VDC.                     |
| 5.DISSIPATION FACTOR    | : 1.0%MAX AT 1KHz,25°c                                |
| 6.INSULATION RESISTANCE | : >9000MΩ (C≤0.33uF)<br>>3000MΩ / uF (C>0.33uF) AT25° |

UNIT:mm

CAPACITANCE		2A(100VDC)			2E(250VDC)			2G(400VDC)			2J(630VDC)		
SYMBOL	u F	L	OD	d	L	OD	d	L	OD	d	L	OD	d
103	0.01							16	6	0.6	16	6	0.6
153	0.015							16	6	0	16	7	0.6
223	0.022							16	8	6	16	8	0.6
333	0.033							16	6.5	0.6	16	9	0.6
473	0.047				16	6	0.6	16	7	0.6	21	8	0.8
683	0.068				16	6	0.6	21	9.5	0.8	21	9	0.8
104	0.1	16	6	0.6	16	7	0.6	21	8	0.8	21	10	0.8
154	0.15	16	6	0.6	16	7.5	0.6	21	8	0.8	26	11	0.8
224	0.22	16	7	0.6	21	8	0.8	26	9	0.8	26	13	0.8
334	0.33	21	7	0.6	21	8.5	0.8	26	10	0.8	26	14	0.8
474	0.47	21	7.5	0.8	21	9.5	0.8	26	12	0.8	31	15	0.8
684	0.68	21	8.5	0.8	26	9	0.8	31	12.5	0.8	31	18	0.8
105	1	21	10	0.8	26	11	0.8	31	15	0.8	31	20.5	0.8
155	1.5	26	10.5	0.8	26	12	0.8	31	18	0.8			
225	2.2	26	11	0.8	31	13.5	0.8						
335	3.3	26	14	0.8	31	16.5	0.8						
475	4.7	31	15	0.8									
685	6.8	31	17.5	0.8									
106	10	31	20.5	0.8									

ORDER: MET 104 10% 250V DIP