

METALLIZED POLYESTER FILM CAPACITORS - MEF SERIES (DIP) 金屬化聚酯膜電容

▲ FEATURES


No defect, no failure but high reliability.

These type capacitor are completely protected against moisture by the coating of epoxy resin or plastic case and Mylar tape.

▲ APPLICATION

These capacitors are designed primarily for use coupling, decoupling, and filters for electronic circuits of low voltage.

They have found widespread acceptance only in the radio and television industry, but also in industrial electronics.

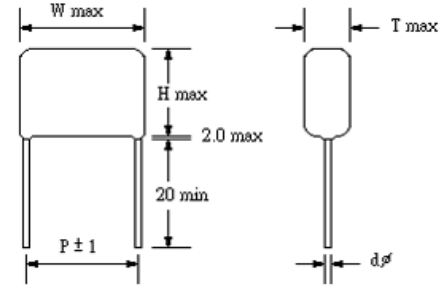

▲ DIMENSION - STANDARD SIZE

P:10 mm

Unit : ± 0.5 mm

CAPACITANCE		100V DC					250V DC					400V DC					630V DC				
SYMBOL	u F	W	H	T	P	d	W	H	T	P	d	W	H	T	P	d	W	H	T	P	d
102	0.001u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
122	0.0012u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
152	0.0015u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
182	0.0018u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
222	0.0022u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
272	0.0027u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
332	0.0033u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
392	0.0039u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
472	0.0047u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
562	0.0056u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
682	0.0068	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6
822	0.0082u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.5	5.5	10.0	0.6
103	0.01u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	9.0	5.5	10.0	0.6
123	0.012u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	9.0	6.0	10.0	0.6
153	0.015u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	10.0	6.5	10.0	0.6
183	0.018u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	10.5	7.0	10.0	0.6
223	0.022u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	11.0	7.5	10.0	0.6
273	0.027u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	8.5	5.5	10.0	0.6	13.0	12.0	8.0	10.0	0.6
333	0.033u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	9.0	5.5	10.0	0.6	13.0	12.5	8.5	10.0	0.8
393	0.039u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	9.0	6.0	10.0	0.6	18.0	11.5	7.0	15.0	0.8
473	0.047u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	10.0	6.5	10.0	0.6	18.0	12.0	7.0	15.0	0.8
563	0.056u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	10.5	7.0	10.0	0.6	18.0	13.0	7.5	15.0	0.8
683	0.068u	13.0	8.0	5.0	10.0	0.6	13.0	8.0	5.0	10.0	0.6	13.0	10.5	7.0	10.0	0.6	18.0	13.5	8.0	15.0	0.8
823	0.082u	13.0	8.0	5.0	10.0	0.6	13.0	8.5	5.5	10.0	0.6	18.0	11.5	6.5	15.0	0.8	18.0	14.0	9.0	15.0	0.8
104	0.1u	13.0	8.0	5.0	10.0	0.6	13.0	8.5	5.5	10.0	0.6	18.0	11.5	7.0	15.0	0.8	18.0	15.0	9.5	15.0	0.8
124	0.12u	13.0	8.5	5.5	10.0	0.6	13.0	9.0	6.0	10.0	0.6	18.0	12.0	7.0	15.0	0.8	18.0	16.0	10.0	15.0	0.8
154	0.15u	13.0	9.0	5.5	10.0	0.6	13.0	10.0	6.5	10.0	0.6	18.0	13.0	7.5	15.0	0.8	24.0	17.0	11.5	20.5	0.8
184	0.18u	13.0	9.0	6.0	10.0	0.6	13.0	10.5	7.0	10.0	0.6	18.0	13.5	8.0	15.0	0.8	24.0	18.0	12.0	20.5	0.8
224	0.22u	13.0	10.0	6.5	10.0	0.6	18.0	10.0	6.5	15.0	0.8	18.0	14.0	9.0	15.0	0.8	24.0	18.0	10.5	20.5	0.8
274	0.27u	13.0	10.5	7.0	10.0	0.6	18.0	10.5	7.0	15.0	0.8	18.0	15.0	9.5	15.0	0.8	24.0	19.0	11.5	20.5	0.8
334	0.33u	13.0	11.0	7.5	10.0	0.6	18.0	11.0	7.5	15.0	0.8	24.0	15.5	9.0	20.5	0.8	24.0	20.5	13.0	20.5	0.8
394	0.39u	13.0	11.5	8.0	10.0	0.6	18.0	12.0	8.0	15.0	0.8	24.0	17.0	9.5	20.5	0.8	24.0	21.0	13.5	20.5	0.8
474	0.47u	18.0	10.0	7.0	15.0	0.8	18.0	12.0	8.5	15.0	0.8	24.0	17.5	10.0	20.5	0.8	32.0	21.5	12.5	27.5	0.8
564	0.56u	18.0	10.5	7.5	15.0	0.8	18.0	13.0	9.0	15.0	0.8	24.0	18.5	11.0	20.5	0.8	32.0	23.0	13.5	27.5	0.8
684	0.68u	18.0	12.0	8.0	15.0	0.8	24.0	12.5	7.5	20.5	0.8	24.0	19.0	12.0	20.5	0.8	32.0	23.5	14.5	27.5	0.8
824	0.82u	18.0	12.5	8.5	15.0	0.8	24.0	13.0	8.0	20.5	0.8	32.0	19.5	10.5	27.5	0.8	32.0	25.5	16.0	27.5	0.8
105	1u	18.0	13.5	9.0	15.0	0.8	24.0	13.5	8.5	20.5	0.8	32.0	19.5	11.0	27.5	0.8	32.0	27.5	17.5	27.5	0.8
125	1.2u	18.0	14.5	10.0	15.0	0.8	24.0	14.0	9.0	20.5	0.8	32.0	20.5	11.5	27.5	0.8	32.0	28.5	19.5	27.5	0.8
155	1.5u	24.0	13.0	8.0	20.5	0.8	24.0	15.5	9.5	20.5	0.8	32.0	22.0	13.0	27.5	0.8	32.0	31.5	21.5	27.5	0.8
185	1.8u	24.0	13.5	8.5	20.5	0.8	32.0	16.5	9.5	27.5	0.8	32.0	23.5	14.0	27.5	0.8					
225	2.2u	24.0	15.0	9.0	20.5	0.8	32.0	17.5	10.5	27.5	0.8	32.0	25.0	15.5	27.5	0.8					
275	2.7u	24.0	15.5	10.0	20.5	0.8	32.0	18.0	11.0	27.5	0.8	32.0	26.5	17.0	27.5	0.8					
335	3.3u	24.0	16.5	10.5	20.5	0.8	32.0	19.5	12.0	27.5	0.8	32.0	28.0	19.0	27.5	0.8					
395	3.9u	24.0	17.0	11.5	20.5	0.8	32.0	20.5	13.0	27.5	0.8										
475	4.7u	32.0	19.5	12.0	27.5	0.8	32.0	22.0	14.0	27.5	0.8										
565	5.6u	32.0	21.0	13.5	27.5	0.8	32.0	23.5	15.0	27.5	0.8										
685	6.8u	32.0	22.0	14.5	27.5	0.8	32.0	25.0	16.5	27.5	0.8										
825	8.2u	32.0	24.5	16.0	27.5	0.8	32.0	26.5	18.5	27.5	0.8										
106	10u	32.0	26.0	17.5	27.5	0.8	32.0	29.0	20.0	27.5	0.8										
126	12u	32.0	28.5	19.5	27.5	0.8	32.0	30.5	22.0	27.5	0.8										
156	15u	32.0	30.0	22.0	27.5	0.8	32.0	22.0	28.0	27.5	0.8										

ORDER: MEF 104 5% 400V P:15mm DIP

TEL: 02-77316666 FAX:02-77318666 MAIL: sales@sesh.com.tw

尙聲電子股份有限公司