


ALUMINUM ELECTROLYTIC CAPACITORS (105°C) - SH SERIES (DIP) 105°C 電解電容-小型品 5mm & 7 mm

▲ 105°C 1000 hours miniature Type 5mm, 7mm height.

LEAD SPACING AND DIAMETER

Unit:mm

$\psi$ D	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\psi$ d	0.5	0.5	0.6	0.6	0.6	0.75	0.75
$\alpha$	1.0	1.0	1.0	1.5	1.5	1.5	1.5
$\beta$	0.5	0.5	0.5	0.5	0.5	0.5	0.5

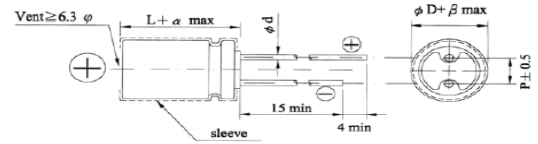

▲ 5 mm TYPE DIMENSION & RIPPLE CURRENT

Size:DxL (mm) Ripple Current (m A :r.m.s/105°C,120 Hz)

V.DC μF	6.3V		10V		16V		25V		35V		50V			
	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple		
0.1											4x5	25		
0.22											4x5	25		
0.33											4x5	25		
0.47											4x5	25		
1.0											4x5	25		
2.2											4x5	25		
3.3											5x5	26		
4.7								4x5	21	4x5	23	6.3x5	35	
10					4x5	20	4x5	21	5x5	27	5x5	26	6.3x5	35
22	4x5	38	4x5	40	4x5	29	5x5	35	6.3x5	45	6.3x5			
33	4x5	43	4x5	42	5x5	38	6.3x5	63						
47	5x5	45	5x5	45	5x5	84	6.3x5	63						
100	5x5	48	6.3x5	75	6.3x5	84								
220	6.3x5	70												

▲ 7 mm TYPE DIMENSION & RIPPLE CURRENT

Size:DxL (mm) Ripple Current (m A :r.m.s/105°C,120 Hz)

V.DC μF	6.3V		10V		16V		25V		35V		50V			
	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple		
0.1											4x7	3		
0.22											4x7	5		
0.33											4x7	6		
0.47											4x7	7		
1.0					4x7	26	4x7	28			4x7	11	5x7	34
2.2					4x7	26	4x7	28			4x7	16	5x7	34
3.3					4x7	26	4x7	28			4x7	20		
4.7					4x7	26	4x7	28	4x7	28	4x7	27		
10					4x7	26	4x7	28	4x7	28	5x7	34	6.3x7	45
22	4x7	33	4x7	36	4x7	39	4x7	28	5x7	36				
33	4x7	40	4x7	44	4x7	39	6.3x7	65	6.3x7	60				
47	5x7	55	5x7	60	6.3x7	75	6.3x7	65	6.3x7	60				
100	5x7	55	5x7	60	6.3x7	110	6.3x7	65						
220	6.3x7	90	6.3x7	100	6.3x7	110								

ORDER: SH 10U 16V 4x7 DIP