


ALUMINUM ELECTROLYTIC CAPACITORS (105°C 10000hrs) - BL SERIES (DIP) 105°C 長壽命電解電容

- ▲ 105°C LONG LIFE
- ▲ 105°C 10000 hours CAPACITORS

LEAD SPACING AND DIAMETER

Unit:mm

ψ D	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ψ d	0.5	0.5	0.6	0.6	0.6	0.75	0.75
α	1.0	1.0	1.0	1.5	1.5	1.5	1.5
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5

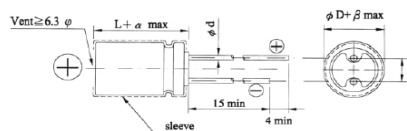

▲ STANDARD TYPE DIMENSION

Ripple Current : mA / rms at 120Hz, 105°C

ohm: at 25°C 100kHz

DxL : mm

μ F \ V.DC	160V		200V		250V		350V		400V		450V	
	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple	DxL	Ripple
4.7							10x13	90	10x13	75	10x13	60
5.6							10x13	90	10x13	75	10x16	90
6.8					10x13	110	10x13	90	10x16	105	10x16	90
8.2					10x13	110	10x16	115	10x16	105	10x16	90
10					10x13	110	10x16	115	10x16	105	10x21	120
12			10x13	120	10x16	145	10x16	115	10x21	130	10x25	140
15	10x13	125	10x13	120	10x16	145	10x21	150	10x25	150	10x25	140
18	10x13	125	10x16	170	10x16	145	10x25	160	13x21	220	13x21	190
22	10x13	125	10x16	170	10x21	200	13x21	245	13x21	220	13x21	190
27	10x16	180	10x16	170	10x25	225	13x21	245	13x21	220	13x26	235
33	10x16	180	10x21	230	13x21	320	13x21	245	13x26	260	13x31	280
39	10x16	180	10x21	230	13x21	320	13x26	280	13x31	295	16x32	410
47	10x21	250	10x25	255	13x26	380	13x31	310	16x24	320	16x32	410
56	10x25	270	13x26	430	13x26	380	16x24	360	16x32	450	16x32	410
68	13x21	380	16x21	500	13x31	450	16x32	500	16x32	450	16x36	480
82	13x21	380	16x21	500	16x24	500	16x32	500	16x36	530	18x36	550
100	13x21	380	16x21	500	16x32	700	16x36	600	18x36	610	18x41	750
120	13x26	450	16x24	530	16x32	700	18x36	700	18x41	800		
150	13x31	550	16x32	800	16x36	780	18x41	900				
180	16x24	600	16x32	800	18x36	950						
220	16x32	850	16x36	900	18x41	1100						
270	16x32	850	18x36	1100								
330	16x36	950	18x41	1250								
390	18x36	1200										
470	18x41	1400										

ORDER: BL 10u 450V 10x21 DIP