


METALLIZED POLYESTER FILM CAPACITORS - MIB SERIES (DIP)Mini BOX

INTRODUCTION

- 1.HIGHT STABILITY.
- 2.NON-INDUCTIVE.
- 3.MINIATURE SIZE.
- 4.SELF-HEALING CHARACTERISTICS.
- 5.PLASTIC CASE, EPOXY RESIN FILLED, BOX MADE OF SOLVENT RESISTANT MATERIAL.
- 6.EXCELLENT FOR USED IN COUPLING, BY-PASS, R.F.FILTERING, AND SOLID-STATE APPLICATION WHERE SIZE IS CORITICAL

SPECIFICATION:

- 1.OPERATING TEMPERATURE: -40°C ~ +85°C
- 2.CAPACITANCE RANGE :0.001~0.047uF
- 3.CAPACITANCE TOLERANCE:±1%(F),±2%(G),±5%(J),±10%(K)
- 4.RATED VOLTAGE: 100VDC, 250VDC, 400VDC, 630VDC.
- 5.DISSIPATION FACTOR :1.0%MAX AT 1KHz, 25°C
- 6.INSULATION RESISTANCE :>9000MΩ (C≤0.33uF)
>3000MΩ / uf(C>0.33uF) AT 25 °

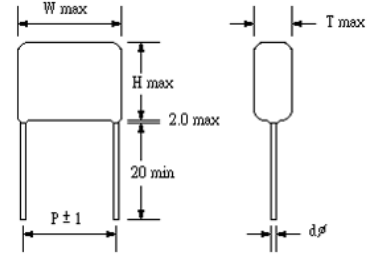

DIMENSION - STANDARD SIZE P:5 mm Unit : ± 0.5 mm

CAPACITANCE		63V DC					100V DC					250VDC				
SYMBOL	u F	W	H	T	P	d	W	H	T	P	d	W	H	T	P	d
102	0.001u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
152	0.0015u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
222	0.0022u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
332	0.0033u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
472	0.0047u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
682	0.0068	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
103	0.01u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
153	0.015u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
223	0.022u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
333	0.033u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
473	0.047u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6
683	0.068u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6
104	0.1u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6
154	0.15u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6
224	0.22u	7.2	6.5	2.5	5.0	0.6	7.2	6.5	2.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6
334	0.33u	7.2	7.5	3.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6					
474	0.47u	7.2	7.5	3.5	5.0	0.6	7.2	7.5	3.5	5.0	0.6					
684	0.68u	7.2	10.0	5.0	5.0	0.6	7.2	10.0	5.0	5.0	0.6					
105	1u	7.2	10.0	5.0	5.0	0.6	7.2	10.0	5.0	5.0	0.6					
155	1.5u	7.2	11.0	6.0	5.0	0.6	7.2	11.0	6.0	5.0	0.6					

ORDER: MIB 103 5% 63V DIP

PS: 一般都做5%